




TECHNICAL INFORMATION SHEET


HOEFLON C6

Multifunctional, robust and very simple operation – that's the C6 compact crane in a nutshell. It's a best seller in the minicrane category. This crane is ideal for placing glass and accurately positioning steel beams.

It is the only compact crane that can lift more than its own weight. This makes it possible for one crane to lower another into an underground space.









Capacity	3,000 kg
Boom outreach	9.25 m, and 13.7 m with options
Hoisting height max. without jib	11.5 m, and 17 m with options
Transport dimensions LxWxH	2.9 m x 0.75 m x 1.82 m
Total weight	2,650 kg, and 2,850 kg with options
Boom angle	-5° to 83°
Boom system	cylinder and chain system
Slewing angle	360°
Driving speed	1st gear: 1.1 km/h
	2nd gear: 2.2 km/h
Engine	Yanmar 3-cylinder diesel
Inclination angle, driving	20°
Outrigger pressure	2,800 kg per outrigger
Ground pressure, tracks	0.79 kg/cm²
Extendible, removable ballast	600 kg
Noise	75 dB

Dimensions including winch and jib	3.14 m x 0.75 m x 1.95 m
Fly jib	4.3 m
Winch	1,000 kg, 2,000 kg and 3,000 kg
Hoisting speed with winch	20.8 m/min
Winch cable	40 m long
Extension section	30° adjustable
Electric motor	230 V single phase
Outriggers	position measuring system for steplessly swivelling outriggers
Outriggers	bend
Outriggers	hydraulically extending stepless
Slewing	unlimited
Crawler	non-marking
Crawler	pick and carry
Lighting	work light on boom and jib
Storage box	extra storage box
Speed controller	900 to 1,700 rpm



















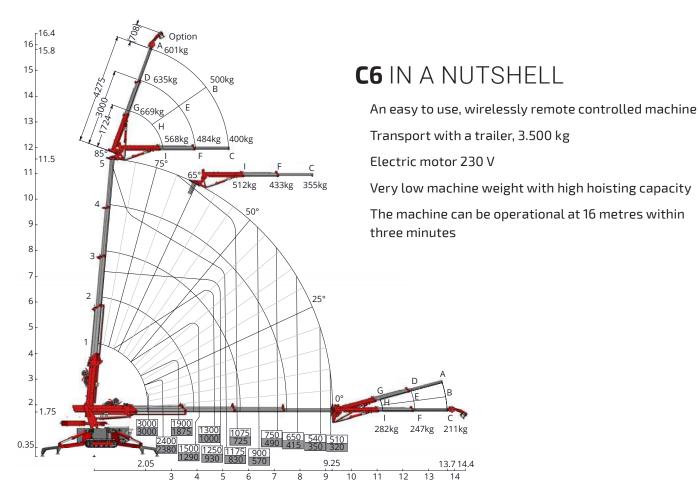

No rights can be derived from the information stated here.

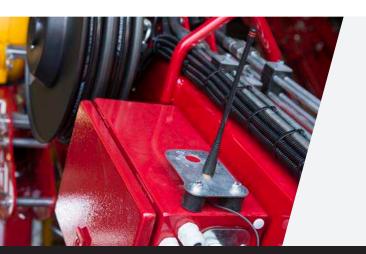

WHY HOEFLON?

Hoeflon compact cranes are functional and offer optimal power and reliability. We offer many possibilities and help you come up with solutions.

Your Hoeflon® dealer♪



Hoeflon International B.V.

address Bellstraat 21 I 3771 AH Barneveld The Netherlands

tel. +31(0)342 400288 email info@hoeflon.com